


TAPPI FILETTATI "T OT"

Passo METRICO M 1,5 CEI EN 60423



Articolo	P	ØA (mm)	C (mm)	L (mm)	Confezione (pz)
T OT M12	M12x1,5	14	5	3	50
T OT M16	M16x1,5	18	6	3	50
T OT M20	M20x1,5	22	6,5	3	50
T OT M25	M25x1,5	27	7	4	20
T OT M32	M32x1,5	34	8	4	20
T OT M40	M40x1,5	44	9	5	20
T OT M50	M50x1,5	54	10	5,5	10
T OT M63	M63x1,5	67	10	6	5

Passo Pg DIN 40 430

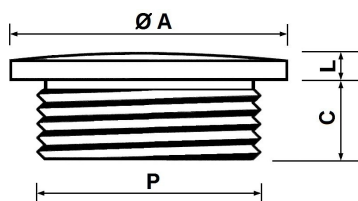

Articolo	P	ØA (mm)	C (mm)	L (mm)	Confezione (pz)
T OT PG7	Pg 7	14	5	3	50
T OT PG9	Pg 9	17	6	3	50
T OT PG11	Pg 11	20	6	3	50
T OT PG13	Pg 13,5	22	6,5	3	50
T OT PG16	Pg 16	24	6,5	3	50
T OT PG21	Pg 21	30	7	4	20
T OT PG29	Pg 29	39	8	4	20
T OT PG36	Pg 36	50	9	6	10
T OT PG42	Pg 42	57	10	6	5
T OT PG48	Pg 48	64	10	6	5

Materiale: OTTONE nichelato.


TAPPI FILETTATI "T OT IP68"

Passo METRICO M 1,5 CEI EN 60423



Articolo	P	ØA (mm)	C (mm)	L (mm)	Confezione (pz)
T OT M12 IP68	M12x1,5	14	5	3	50
T OT M16 IP68	M16x1,5	18	6	3	50
T OT M20 IP68	M20x1,5	22	6,5	3	50
T OT M25 IP68	M25x1,5	27	7	4	20
T OT M32 IP68	M32x1,5	34	8	4	20
T OT M40 IP68	M40x1,5	44	9	5	20
T OT M50 IP68	M50x1,5	54	10	5,5	10
T OT M63 IP68	M63x1,5	67	10	6	5

Passo Pg DIN 40 430

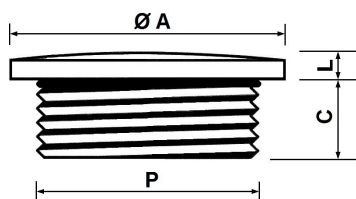

Articolo	P	ØA (mm)	C (mm)	L (mm)	Confezione (pz)
T OT PG7 IP68	Pg 7	14	5	3	50
T OT PG9 IP68	Pg 9	17	6	3	50
T OT PG11 IP68	Pg 11	20	6	3	50
T OT PG13 IP68	Pg 13,5	22	6,5	3	50
T OT PG16 IP68	Pg 16	24	6,5	3	50
T OT PG21 IP68	Pg 21	30	7	4	20
T OT PG29 IP68	Pg 29	39	8	4	20
T OT PG36 IP68	Pg 36	50	9	6	10
T OT PG42 IP68	Pg 42	57	10	6	5
T OT PG48 IP68	Pg 48	64	10	6	5

Materiali: tappo in OTTONE nichelato;
O-Ring in NITRILE 70sh A.

Temperatura d'impiego: da -40°C a +120°C

Grado di protezione: IP 68

FIEM S.r.l. Via M. Idiomi, 3/26 - 20090 ASSAGO (MI)
Tel. 02 89452417 — Fax 02 89452538
e-mail: fiem@fastwebnet.it — www.fiemsrl.it